




- Resists UV,Ozone,fungus,acids and alkalis.
- Excellent weather resistance and waterproof sealing properties.
- Good thermal stability, no gaps under thermal expansion and contraction.
- Wide range of size,accommodates a wide range of cable, wire,conduit and hose diameters.
- Good aging resistant, retains its resiliency even after prolonged years of aging and exposure.

Ordering Information



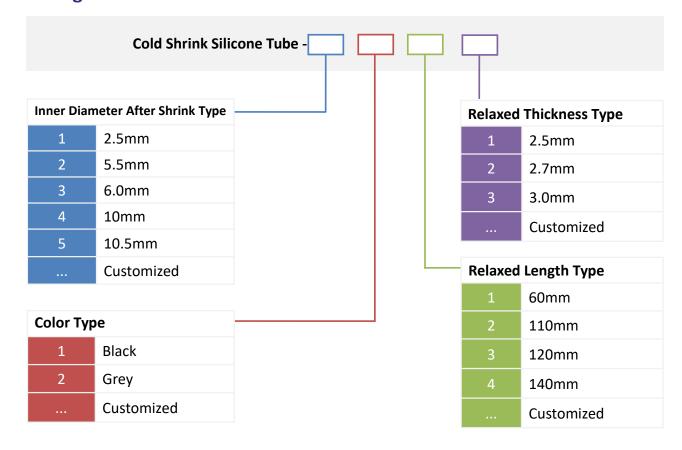


COLD SHRINK SILICONE TUBE

| Specification | FCST-15*60 | FCST-25*120 | FCST-28*110 | FCST-40*140 | FCST-45*140 |
|-----------------|------------|---|-------------|---|-------------|
| Inner Diameter | 15mm | 25mm | 28mm | 40mm | 45mm |
| Before Shrink | (0.591'') | (0.984'') | (1.102'') | (1.575'') | (1.772'') |
| Inner Diameter | 2.5mm | 5.5mm | 6.0mm | 10mm | 10.5mm |
| After Shrink | (0.098'') | (0.217'') | (0.236'') | (0.394'') | (0.413'') |
| Unrelaxed | 45mm | 110mm | 100mm | 130mm | 130mm |
| Length | (1.772'') | (4.331'') | (3.937'') | (5.118'') | (5.118'') |
| Relaxed Length | 60mm | 120mm | 110mm | 140mm | 140mm |
| | (2.362'') | (4.724'') | (4.331'') | (5.512'') | (5.512'') |
| Relaxed | 2.5mm | 2.5mm | 2.7mm | 3.0mm | 3.0mm |
| Thickness | (0.098'') | (0.098'') | (0.106'') | (0.118'') | (0.118'') |
| Min. Applicable | 2.75mm | 7.3mm | 8.5mm | 12mm | 12mm |
| Size | (0.108'') | (0.287'') | (0.335'') | (0.472'') | (0.472'') |
| Max Applicable | 12.5mm | 21mm | 24mm | 35mm | 36mm |
| Size | (0.492'') | (0.827'') | (0.945'') | (1.378'') | (1.417'') |
| Cables | RG174/U | RG8x, RG8, RG213, RG214, RFC240, RFC400, RFC600, LMR900 1/4", 1/2" Corrugated | | RG8, RG213, RG214, RFC400, RFC600, LMR900 1/4", 1/2" Corrugated | |
| Connectors | SMA | 4.1/9.5, 4.3/10, BNC, FME, UHF, SMA, TNC,Type N, Type F, NEX10 | | 4.1/9.5, 4.3/10, 7/16, UHF, Type N | |



Fiber Cable Solution Technology Co.,Ltd.

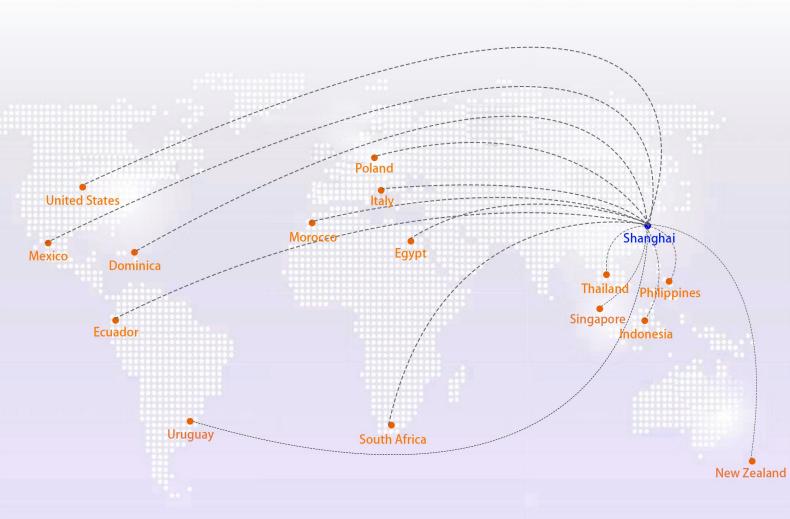

Overseas Agency



www.fcst.com www.micro-duct.com



FCST - Better FTTx, Better Life.

At FCST, we manufacture top-quality microduct connectors, microduct closure, telecom manhole chambers and fiber splice boxes since 2003. Our products boast superior resistance to failure, corrosion, and deposits, and are designed for high performance in extreme temperatures. We prioritize sustainability with mechanical couplers and long-lasting durabili -ty.

FCST aspires to a more connected world, believing everyone deserves access to high-speed broadband. We're dedicat -ed to expanding globally, evolving our products, and tackling modern challenges with innovative solutions. As technology advances and connects billions more devices, FCST helps developing regions leapfrog outdated technologies with sustainable solutions, evolving from a small company to a global leader in future fiber cable needs.

Rm402 block A Watts gallop tower No.2816 YiXian Rd, BaoShan District, Shanghai 200441. Tel:+86-21-38726791 +86-21-38726792 Fax:+86-21-38726793